

P O R T A B L E O U T B O A R D S

2011  
NEW  
MODELS

FOUR STROKE

MFS 4/5/6

CONVENIENT

Benefit from its light and compact design and easy-to-use convenient features




**TOHATSU**  
Outboards



# FEATURES & SPECIFICATIONS

## FOUR STROKE MFS 4/5/6

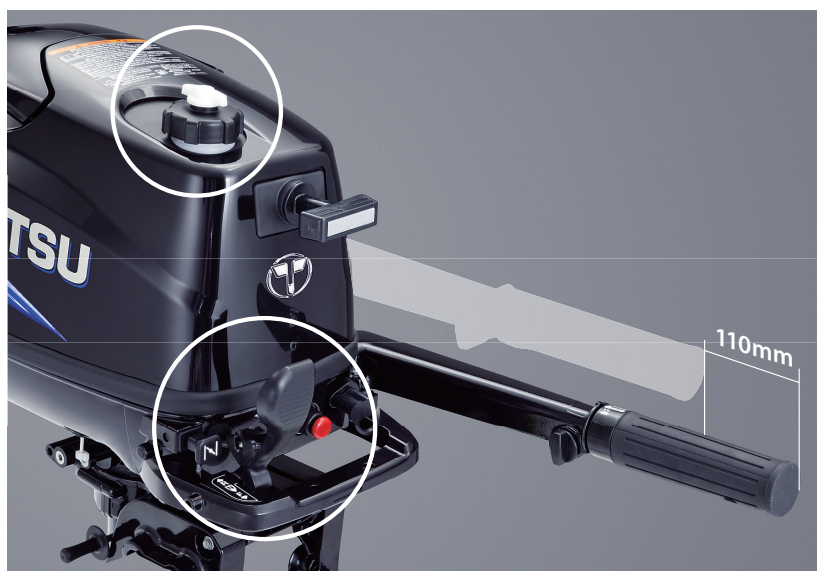

FRONT SHIFT LEVER / LONGER TILLER HANDLE / FUEL TANK CAP




FRONT SHIFT LEVER



LARGER CARRYING HANDLE (FRONT)



HOLDING GRIP (REAR)



FLUSHING DEVICE (OPTIONAL)

### FEATURES

- Industry first front mounted shift lever in its class
- Longer tiller handle (110mm extended from previous model)
- Larger carrying handle and newly designed holding grip.
- Front located fuel tank cap for easier refueling
- EPA/ CARB and EU emission approved
- Newly designed top/bottom cowl and decals
- Convenient flushing device available (Optional)
- Water separator kit available (Optional)
- Steering lock kit available (Optional)



### MFS 6 *Sail Pro*

A perfect choice for sailboats! Tohatsu's uniquely designed 6hp, 4 stroke motor is ideal for sailboats or any marine vessel requiring a 20"/25" shaft outboard motor. 5 amp/12V charging system, charging cable and a high thrust sail propeller are standard equipment.



RECTIFIER



CHARGING CABLE



HIGH THRUST PROPELLER

	MFS 4 <sub>CD</sub>	5 <sub>CS</sub> MFS 5 <sub>CD</sub>	6 <sub>CS</sub> MFS 6 <sub>CD</sub>	MFS 6 <sub>CS</sub> Sail Pro
ENGINE TYPE	4-Stroke 1-Cylinder Carburetor			
OUTPUT kW (HP)	2.9 (4)	3.7 (5)	4.4 (6)	4.4 (6)
DISPLACEMENT CC (CU IN)	123 (7.5)			
BORE X STROKE MM (IN)	59 x 45 (23.2 x 17.72)			
MAX. RPM RANGE	4,500 - 5,500	4,500 - 5,500	5,000 - 6,000	5,000 - 6,000
STARTING	Manual			
IGNITION SYSTEM	Digital CD Ignition System			
CONTROL TYPE	Tiller Handle or Remote Control (Optional)			
GEAR SHIFT	F-N-R			
GEAR RATIO	2.15 (13:28)			
EXHAUST	Through-The-Prop Exhaust			
PROPELLER SELECTION RANGE	7" - 9"	7" - 9"	7" - 9"	6"
TRANSOM HEIGHT	15", 20"	15", 20"	15", 20"	20", 25"
FUEL TANK LITTLE (US GAL.)	CS: 12 (3.2) Separate Tank CD: 1.15 (0.30) Integral Tank 12 (3.2) Separate Tank (Optional)		CS: 12 (3.2) Separate Tank	
WEIGHT KG (LBS)*	CD: 26.1 (58)	CS: 25.6 (57) CD: 26.1 (58)	CS: 25.6 (57) CD: 26.1 (58)	CS: 26.6 (59)
ALTERNATOR OUTPUT	12V, 60W, 5A (Optional)		12V, 60W, 5A	

\* Weight Specification is based on the lightest version.

VISIT US [WWW.TOHATSU.CO.JP](http://WWW.TOHATSU.CO.JP)  
[WWW.TOHATSU.COM](http://WWW.TOHATSU.COM)

Tohatsu Corporation

5-4, Azusawa 3-chome, Itabashi-ku, Tokyo, 174-0051, Japan Phone: 81-3-3966-3117 Fax: 81-3-3966-0090  
©2010 Tohatsu Corporation All rights reserved.

**TOHATSU**  
Outboards